

Aluminum Seals

INFICON ISO-K quality fittings are manufactured according to ISO 1609, DIN 28404 and Pneurop 6606. Our quality large diameter fittings are the standard vacuum components for all vacuum and high vacuum lines. The high quality INFICON fittings are designed and tested for leak rates less than 1×10^{-9} mbar l/s.



BENEFITS

- Competitively priced
- World wide logistics
- Design and measures follow strictly international respected standards
- Surface finish, welds, material specifications and cleanliness meet or exceed high vacuum specifications
- 2011/65/EU RoHS compliant


ORDER INFORMATION

Type	DN 63 ISO-K	DN 100 ISO-K	DN 160 ISO-K	DN 250 ISO-K
Aluminum seal DN 100 ISO-K		212-302		
Aluminum seal DN 160 ISO-K			212-303	
Aluminum seal DN 250 ISO-K				212-305
Aluminum seal DN 63 ISO-K	212-301			

SPECIFICATIONS

Type	DN 63 ISO-K	DN 100 ISO-K	DN 160 ISO-K	DN 250 ISO-K
Dimension A	85.6	116.6	166.6	276.6
Dimension B	83	114	164	274
Dimension C	69.8	101.8	152.8	260.8
Dimension D	2.6	2.6	2.6	2.6
Dimension E	4.5	4.5	4.5	4.5
Material:	Aluminum annealed 6082	Aluminum annealed 6082	Aluminum annealed 6082	Aluminum annealed 6082

DIMENSIONS

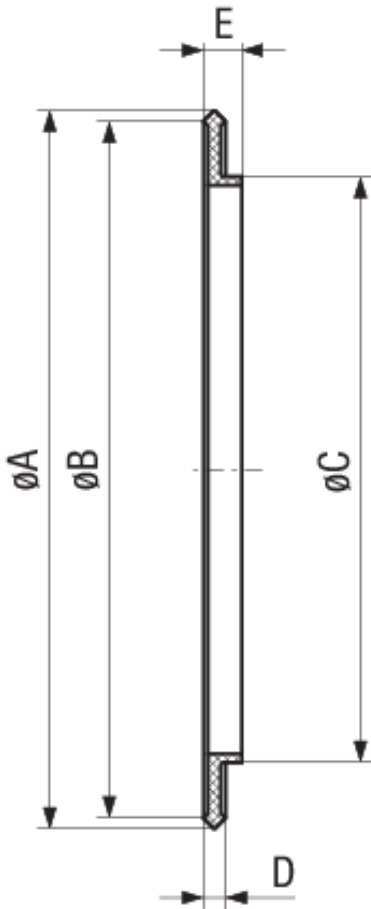

www.inficon.com reachus@inficon.com

Due to our continuing program of product improvements, specifications are subject to change without notice. RateWatcher is a trademark of INFICON. All other trademarks are the property of their respective owners.

(2015-08) © 2015 INFICON