
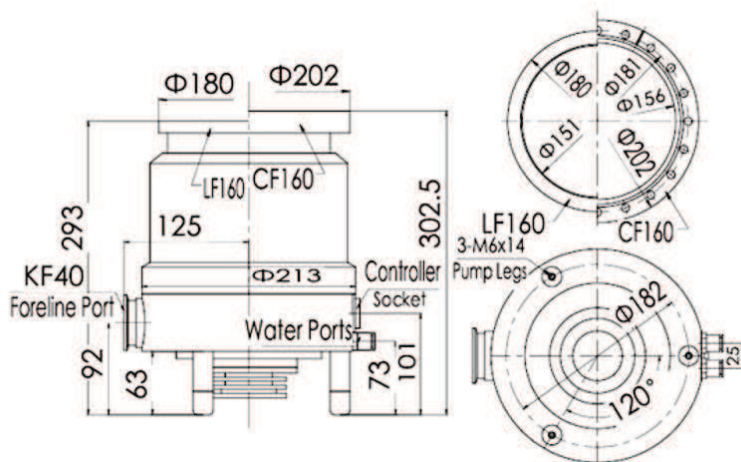


# TYPE EVT-700E

water cooled

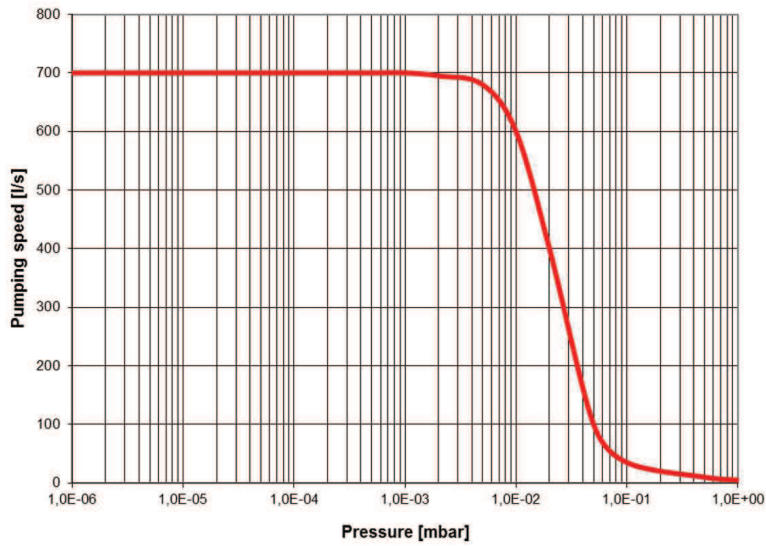

## TYPE EVT-700E

water cooled

Technical Data		TYPE EVT-700E	
		700E-LF	700E-CF
Pump type		Compound/Drag	Compound/Drag
Inlet Flange		160 ISO-K	160 CF
Fore vacuum Flange		40 KF	40 KF
Pumping speed (air)	l/s	700	700
Rotation Speed	rpm	36.000	36.000
H <sub>2</sub> Compression Ratio		6x10 <sup>6</sup>	6x10 <sup>6</sup>
N <sub>2</sub> Compression Ratio		1x10 <sup>9</sup>	1x10 <sup>9</sup>
Ultimate Vacuum	mbar	6x10 <sup>-9</sup>	6x10 <sup>-10</sup>
Max. bake-out temp.	°C	100	100
Run up Time	min	< 4	< 4
Control Unit		TCDP-II	TCDP-II
Input Voltage	VAC	220/110 ±10%	220/110 ±10%
Cooling medium		Air / water	Air / water
Bearing type		Ceramic Grease	Ceramic Grease
Operating Orientation		Any	Any
Weight	kg	19	19

Ordering Information	TYPE EVT-700E	
	700E-LF	700E-CF
<b>Turbo drag pump EVT-700E</b> incl. splinter screen	807000	807001
<b>Control unit type TCDP-II</b>	800040	800040
Cable 2,5 m	800011	800011
Cable 5 m	800012	800012
Cable 10 m	800013	800013
Cable 20 m	800014	800014
Other lengths	Upon request	Upon request
Heating jacket 230V AC	-	807020
Venting valve NC 230V AC, 50/60Hz	250-533	
Venting valve NC 24V AC, 50/60Hz	250-531	
Venting valve NC 24V, DC	250-530	
Filter for venting valves	215-152	
Venting valve NO 200-230V, 50/60Hz	250-851	
Venting valve NO 24V, DC	250-850	
Delayed venting unit	Upon request	
Recommended pre-vacuum pump: Standard operation Type EVD-24, 230V AC	422901	
Purge gas operation Type EVD-36, 230V AC Also Dry pumps can be used	423901	