

O-Ring FPM

INFICON ISO-KF fittings are manufactured according to ISO 2861/1, DIN 28403 and Pneurop 6606. Our quality fittings are the standard components for all vacuum and high vacuum applications. The high quality INFICON components are designed and tested for leak rates less than 1×10^{-9} mbar l/s.



BENEFITS

- Competitively priced
- World wide logistics
- 2011/65/EU RoHS compliant

ORDERING INFORMATION

Type	DN 10 ISO-KF	DN 16 ISO-KF	DN 20 ISO-KF	DN 25 ISO-KF	DN 32 ISO-KF	DN 40 ISO-KF
O-ring, FPM75, $\varnothing 15 \times 5$, 10 piece	211-153					
O-ring, FPM75, $\varnothing 18 \times 5$, 10 piece		211-154				
O-ring, FPM75, $\varnothing 25 \times 5$, 10 piece			211-155			
O-ring, FPM75, $\varnothing 28 \times 5$, 10 piece				211-156		
O-ring, FPM75, $\varnothing 40 \times 5$, 10 Stück					211-157	
O-ring, FPM75, $\varnothing 42 \times 5$, 10 piece						211-158
O-ring, FPM75, $\varnothing 55 \times 5$, 10 piece						


DN 50 ISO-
KF

211-159

SPECIFICATIONS

Type	DN 10 ISO-KF	DN 16 ISO-KF	DN 20 ISO-KF	DN 25 ISO-KF	DN 32 ISO-KF	DN 40 ISO-KF
Dimension A	15	18	25	28	40	42
Dimension B	5	5	5	5	5	5

DIMENSIONS

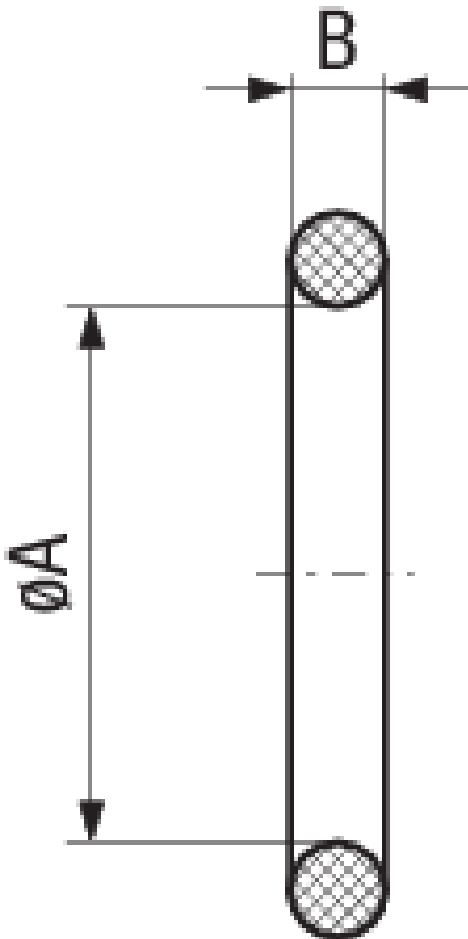

SPECIFICATIONS

Type	DN 50 ISO-KF
Dimension A	55
Dimension B	5



www.inficon.com reachus@inficon.com

Due to our continuing program of product improvements, specifications are subject to change without notice.
RateWatcher is a trademark of INFICON. All other trademarks are the property of their respective owners.

(2014-09) © 2014 INFICON